


# TUSCANY 4PK CUSHION ROCKERS ASSEMBLY INSTRUCTIONS

ITEM# SC-J-250-1ER/4



**QUESTIONS, PROBLEMS, MISSING PARTS WITH THIS PRODUCT? DO NOT RETURN TO YOUR RETAILER, PLEASE CALL OUR CUSTOMER SERVICE DEPARTMENT 9:00 A.M. TO 5:00 P.M. EASTERN STANDARD TIME MONDAY THROUGH FRIDAY PHONE# 1-800-229-0730**

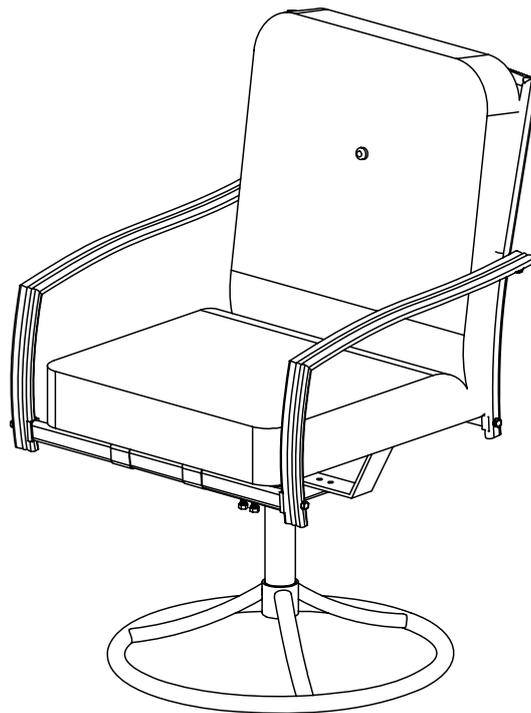

<p>A</p> <p>4PCS</p>	<p>B</p> <p>4PCS</p>	<p>C</p> <p>RIGHT</p> <p>4PCS</p>	<p>D</p> <p>LEFT</p> <p>4PCS</p>	<p>E</p> <p>4PCS</p>	<p>F</p> <p>4PCS</p>	<p>G</p> <p>4PCS</p>
<p>H</p> <p>4PCS</p>	<p>Ia</p> <p>M6x25L</p> <p>8PCS+1</p>	<p>Ib</p> <p>M6x55L</p> <p>16PCS+1</p>	<p>Ic</p> <p>M8x40L</p> <p>8PCS+1</p>	<p>Id</p> <p>M6</p> <p>32PCS+3</p>	<p>Ie</p> <p>M8</p> <p>8PCS+1</p>	<p>If</p> <p>M8</p> <p>8PCS+1</p>
<p>Ig</p> <p>M6</p> <p>8PCS+1</p>	<p>Ih</p> <p>M8</p> <p>8PCS+1</p>	<p>Ii</p> <p>1PC</p>	<p>Ij</p> <p>1PC</p>	<p>Ik</p> <p>M8 M6</p> <p>1PC</p>	<p>Il</p> <p>M8 M6</p> <p>1PC</p>	

# TUSCANY 4PK CUSHION ROCKERS

## ASSEMBLY INSTRUCTIONS

### ITEM# SC-J-250-1ER/4

- 1) Remove all components from the polybag and unwrap all package materials. Place them on a flat surface. Please count the components, there are:
  - a) 4 backs (A)
  - b) 4 seats (B)
  - c) 4 right arms (C)
  - d) 4 left arms (D)
  - e) 4 T shaped connectors (E)
  - f) 4 rocker bases (F)
  - g) 4 center posts (G)
  - h) 4 seat and back cushions (H)
  - i) One accessory bag consists of 8 M6×25L bolts (Ia) plus 1 spare, 16 M6×55L bolts (Ib) plus 1 spare, 8 M8×40L bolts (Ic) plus 1 spare, 32 M6 metal washers (Id) plus 3 spares, 8 M8 metal washers (Ie) plus 1 spare, 8 Lock Washers (If) plus 1 spare, 8 M6 nuts (Ig) plus 1 spare, 8 M8 nuts (Ih) plus 1 spare, 1 assembly instructions sheet (Ii), 1 Allen wrench (Ij), 1 Open Hex wrench (Ik), 1 Hex wrench (Il).

- 2) Attach the back (A) to the seat (B), align the holes on the back with the holes on rear crossbar of the seat. For each hole insert an M6×25L bolt (Ia) through an M6 metal washer (Id), through the back, secure into the rear crossbar. Don't tighten completely. Repeat procedure for the other side. See Fig. 1.

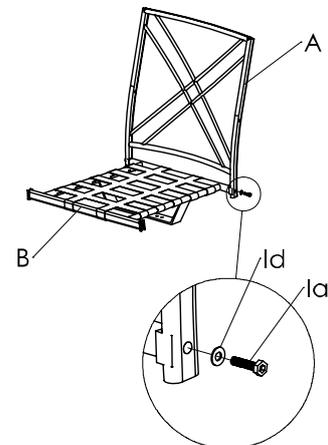


Fig. 1

- 3) Attach the right arm (C) and the left arm (D) to the assembled seat and back. Align the holes, insert an M6×55L bolt (Ib) through an M6 metal washer (Id), through the arm (D), through the back (A), through another M6 metal washer (Id) and secure with an M6 nut (Ig), See Fig. 2. Insert an M6×55L bolt (Ib) through an M6 metal washer (Id) and secure into the seat (B). See Fig. 3. Don't tighten completely. Repeat procedure for the right arm (C).

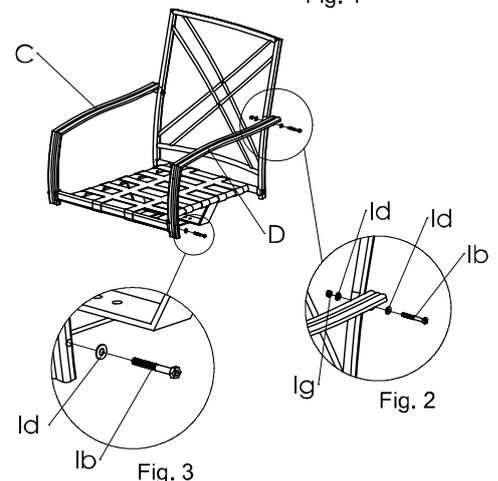


Fig. 2


Fig. 3

# TUSCANY 4PK CUSHION ROCKERS


## ASSEMBLY INSTRUCTIONS

### ITEM# SC-J-250-1ER/4


- 4) Tighten all the bolts and put the chair frame upside down per drawing. Attach the T shaped connector (E) to the chair frame. Align the holes, for each hole insert an M8×40L bolt (Ic) through a lock washer (If), through the chair frame, through the T shaped connector (E), through another M8 metal washer (Ie) and secure with an M8 nut (Ih). Tighten the bolts completely. See Fig. 4.

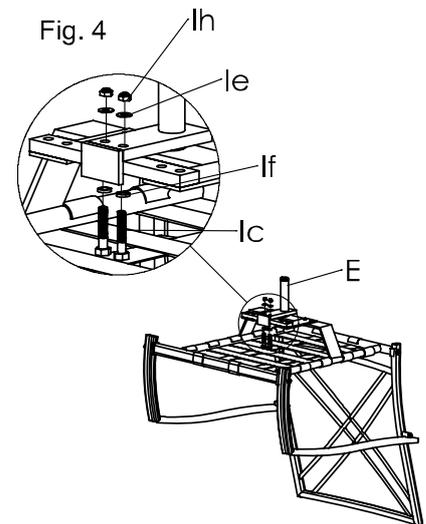

- 5) Place the rocker base (F) on a flat surface, and insert the center post (G) into the hole located at the center of the base (F). See Fig. 5. Push the center post (G) down firmly and twist it left and right as necessary.



- 6) Align the connector of the assembled rocker seat with the hole in center post and push the rocker seat down firmly until fully engaged. See Fig. 6.

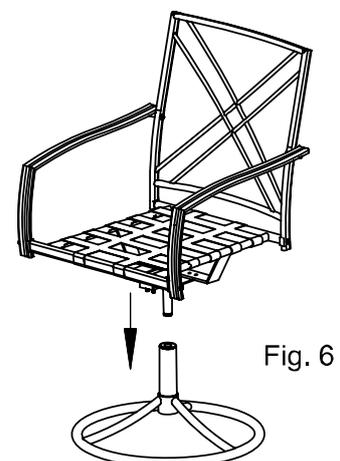

TUSCANY 4PK CUSHION ROCKERS  
ASSEMBLY INSTRUCTIONS  
ITEM# SC-J-250-1ER/4

- 7) Attach the cushion to the assembled chair with the velcro tab. See Fig. 7.

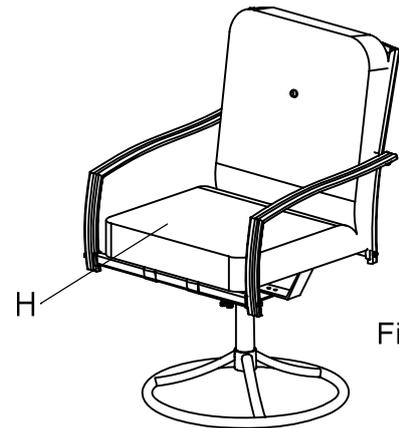


Fig. 7

- 8) Repeat the procedure for the remaining three chairs.


Your cushion rockers are now ready for use.

NUMARK INDUSTRIES COMPANY LTD.,  
PRINTED IN CHINA

TUSCANY 42" SQUARE  
TEMPERED GLASS TOP TABLE  
ASSEMBLY INSTRUCTIONS  
ITEM# SC-J-250-1TE



**QUESTIONS, PROBLEMS, MISSING PARTS WITH THIS PRODUCT? DO NOT RETURN TO YOUR RETAILER, PLEASE CALL OUR CUSTOMER SERVICE DEPARTMENT 9:00 A.M. TO 5:00 P.M. EASTERN STANDARD TIME MONDAY THROUGH FRIDAY PHONE# 1-800-229-0730**

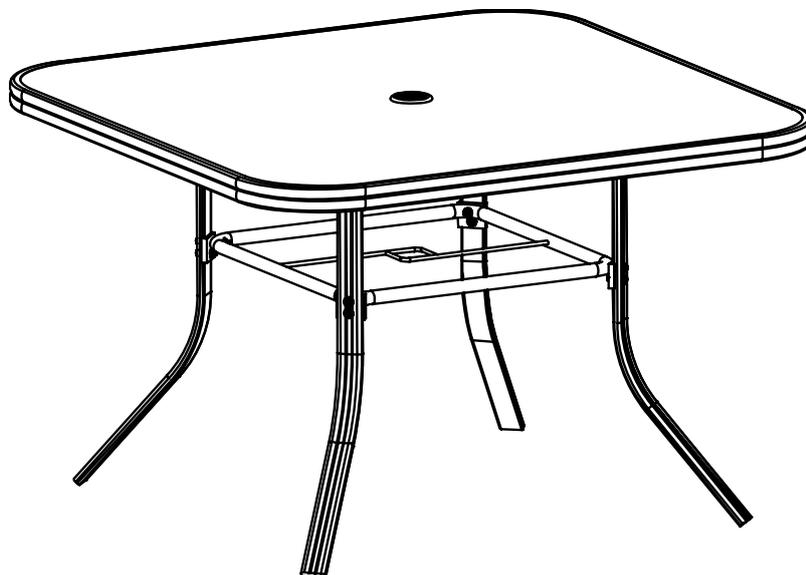


A  1PC	B  4PCS	C  1PC	Da  short 4PCS	Db  long 4PCS	Dc  4PCS	Dd  16PCS+1	De  1PC
Df  1PC	Dg  8PCS+1	Dh  1PC	Di  1PC	Dj  1PC			

TUSCANY 42" SQUARE  
TEMPERED GLASS TOP TABLE  
ASSEMBLY INSTRUCTIONS  
ITEM# SC-J-250-1TE

- 1) Remove the table from the box and place it upside down (the side with metal legs up) on top of the carton box. Cut the shrink wrap open and verify all parts are present. There are:
  - a) 1 tempered glass with rim (A)
  - b) 4 metal legs (B)
  - c) 1 metal centre ring (C)
  - d) One accessory bag which consists of 4 short bolts (Da), 4 long bolts (Db), 4 screws (Dc), 16 metal washers (Dd) plus 1 spare, 1 plastic umbrella insert piece (De), 1 glass bumper (Df), 8 nuts (Dg) plus 1 spare, 1 Allen wrench (Dh), 1 open hex wrench (Di), 1 Assembly Instructions sheet (Dj).

- 2) Insert four legs (B) into four plastic receivers on the tabletop rim (A), working the legs in until the holes in legs with receivers line up. Place the metal center ring (C) between the four legs. (Note: the center ring with arrow "↓") should point toward the tabletop). Insert a short bolt (Da) from outside through a metal washer (Dd), a metal leg (B) and the metal center ring (C), then another metal washer (D), and secure with a nut (Dg). Do not tighten. Then Insert a long bolt (Db) from outside to inside through a metal washer (Dd), through a metal leg (B) and the metal center ring (C), then another metal washer (D), and secure with a nut (Dg). Do not tighten. Repeat procedure for the remaining three legs.

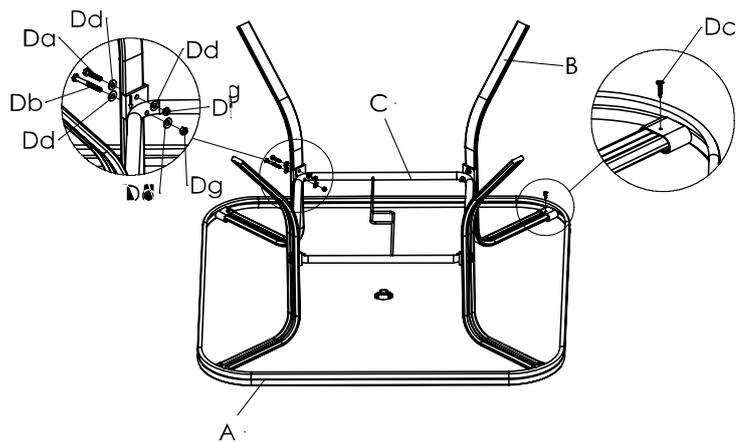

- 3) Adjust the metal legs (B) and support bars, insert a screw (Dc) into each plastic receiver on the rim and into the leg. Tighten all screws.
- 4) Securely tighten all bolts by using the Allen wrench (Dh) and open hex wrench (Di) diagonally. Turn the table over and place the plastic umbrella insert piece (De) into center of the glass table umbrella hole if not use the umbrella.

Your table is ready for use.

TUSCANY 9FT MARKET CRANK  
UMBRELLA WITH 3 POSITIONS TILT  
ITEM# S-9U



**QUESTIONS, PROBLEMS, MISSING PARTS WITH THIS PRODUCT? DO NOT RETURN TO YOUR RETAILER, PLEASE CALL OUR CUSTOMER SERVICE DEPARTMENT 9:00 A.M. TO 5:00 P.M. EASTERN STANDARD TIME MONDAY THROUGH FRIDAY PHONE# 1-800-229-0730**

\* To avoid potential damage to the umbrella. Please read the following instructions before using.

\* Failure to follow instructions may result in permanent damage to the umbrella.

- 1) Remove the umbrella from the box, insert the bottom pole into an umbrella base. A heavy or weighted base must be used to help stabilize the umbrella. Securely fastened the umbrella to the umbrella base.
- 2) Hold the umbrella upside down and shake gently, allowing the ribs to fall naturally into the open position.
- 3) Slowly crank the handle until the cord slack is taken up.
- 4) Turn the umbrella upright and insert the top pole into the bottom pole, the push button located on the top pole must completely extend through the opening on the bottom pole.
- 5) You may now crank the umbrella to its fully opened position.
  - Care and cleaning instructions: wash with mild soap, rinse with water, let air dry.
  - Umbrella should not be left open and unattended especially in windy conditions.
  - To avoid potential damage to the table, the umbrella should be stored away from the table when not in use.
  - Always let the umbrella dry completely before storing.

NUMARK INDUSTRIES COMPANY LTD.,  
PRINTED IN CHINA