

# BigLots.com



For assistance with assembly, please contact customer service  
1-888-733-8169

1/4

## PRE-ASSEMBLY PREPARATION:









**DO NOT LET CHILDREN PLAY IN OR AROUND THE UNIT DUE TO THE POSSIBLE RISK OF FINGER ENTRAPMENT.**

- Please read through the instructions before beginning assembly.
- Two adults are recommended for assembly.
- Clear out the space for assembly and lay out all of the parts based on the Parts List, extra room will allow you to easily determine if all the pieces are present.
- Save all packing materials until assembly is complete to avoid accidentally discarding smaller parts or hardware.
- Keep small parts and pieces away from children until fully assembled.
- Ensure that all bolts are securely tightened before use. It is recommended that you re-check all nuts and bolts occasionally and re-tighten as necessary.
- Do not swing in the chair beyond the parameter of the base as doing so may result in the chair tipping over and could result in injury.
- Use on even surfaces only.
- Improper use of this product or failure to use as directed may result in injury.

## PANEL AND FITTINGS IDENTIFICATION:

		
(A) Seat Qty:1	(B) Back frame Qty:1	( C ) Back Qty:1



## HARDWARE LIST:

			
(D) Hollow bolt Qty:2	(E) Washer Qty:2	(F) Short bolt Qty:2	(G) Long bolt Qty:4
			
(H) Nut Qty:4	(I) Cup nut Qty:4	(J) Cup nut Qty:4	(K) Allen wrench Qty: 2
			
(L) Wrench Qty: 1			

## STEP-BY-STEP ASSEMBLY:

1

Step 1: Attach Back frame (B) to Seat(A) by using four Long bolts(G) and four Nuts (H), tighten with allen wrench (K) and wrench (L). Then with four Cap nuts(J) and four Cap nuts(I)

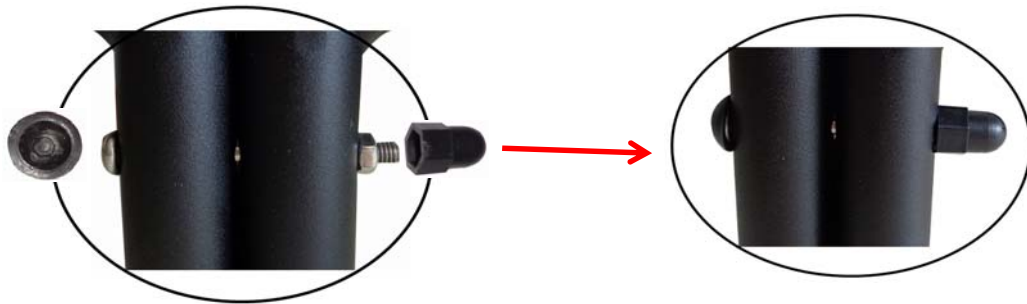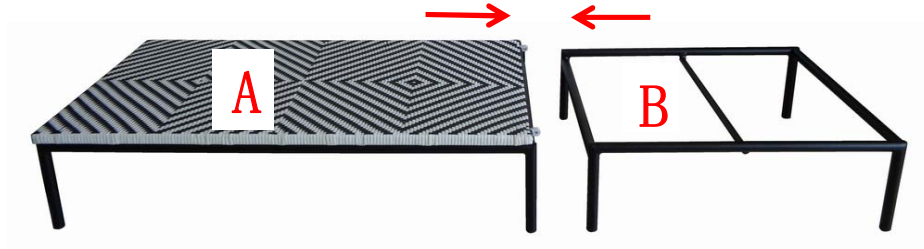

2

Step 2: Connect Back (C) to Seat(A) by using two Hollow bolts(D), two Washers(E) and two Short bolts(F), tighten with two Allen wrenches(K). To assemble easily, please keep short bolt(F) always on the outer side.

